


Technical Bulletin PEC178 Pecora Sealant Adhesion to Dryvit EIFS Base Coats

Per EIMA installation guidelines, expansion joints should be designed for a minimum of four times the anticipated movement, but not less than 3/4" (19 mm). For joints where movement has been determined to be negligible, the minimum butt joint size is 1/2" (13 mm). Note that sealant is applied to the reinforced base coat and not to the finish coat.

The recommended Pecora joint sealants for EIFS applications are the following:

- 890NST Silicone
- 890FTS Silicone
- Dynatrol II Polyurethane

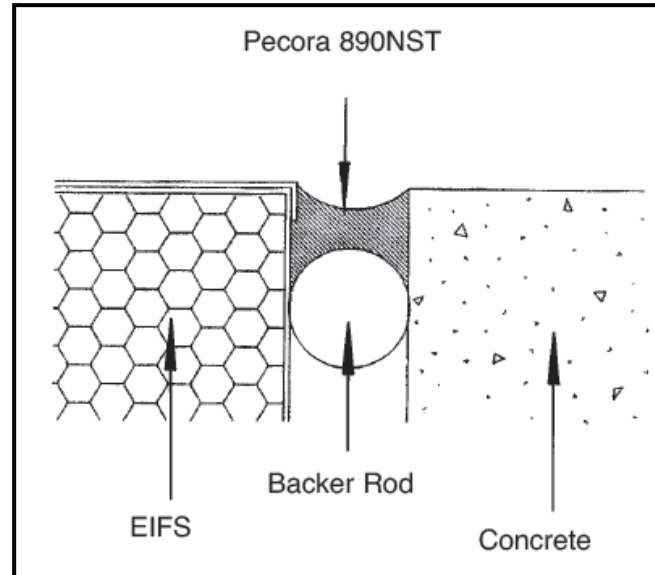

Pecora requires the use of a sealant primer to ensure proper field performance of the installed joint sealant. Listed in the table below are the required Pecora sealant primers for each joint sealant and Dryvit base coat.

Sealant Primer Requirements for Dryvit EIFS Base Coat

<i>Dryvit EIFS Base Coat</i>	<i>Silicone Sealant</i>		<i>Polyurethane Sealant</i>
	890NST	890FTS	Dynatrol II
	Required Sealant Primer		
Primus	P150	P150	P150 ¹
Primus w/ Color Prime	P150 ¹	P150 ¹	P150 ¹
Genesis	P150	P150	P150 ¹
Genesis w/ Color Prime	P150	P150	P150 ¹
Primus DM	P150 ¹	P150 ¹	P150 ¹
Primus DM w/ Color Prime	P150 ¹	P150 ¹	P150 ¹
Genesis DM	P150	P150	P150 ¹
Genesis DM w/ Color Prime	P150 ¹	P150 ¹	P150 ¹
NCB	P150 ¹	P150 ¹	P150 ¹
NCB w/ Color Prime	P150 ¹	P150 ¹	P150 ¹

¹Alternate primer = P75

Since Pecora architectural sealants are applied to varied substrates under diverse environmental conditions and construction situations it is recommended that substrate testing be conducted prior to application.

