

#### BASIC USES

Sealing of transverse contraction and expansion joints, longitudinal, centerline and shoulder joints in Portland cement concrete (PCC) and asphalt. Applications include roadways, airfield and parking deck/garage control joints.

#### MANUFACTURER

##### Pecora Corporation

165 Wambold Road  
Harleysville, PA 19438  
Phone: 215-723-6051  
800-523-6688  
Fax: 215-721-0286  
Website: www.pecora.com

#### PRODUCT DESCRIPTION

Pecora 301 NS Silicone Pavement Sealant is a one part, ultra-low modulus product designed for sealing joints in concrete or asphalt pavement. It has excellent unprimed adhesion to concrete, metal and asphalt substrates, superior weather resistance and remains flexible at extremely low temperatures.

Pecora 301 NS Silicone Pavement Sealant is a non-sag product designed for applications on flat and sloped surfaces.

#### Advantages:

- Reduces pavement deterioration by restricting surface water penetration into underlying base and sub base layers. Convenient
- one component, neutral moisture curing system. Ultra-low modulus
- resulting in high movement capability.
- Ease of application with standard automated bulk dispensing equipment such as Graco or Pyles.
- VOC compliant.
- Primerless adhesion to concrete and asphalt.
- Aids in elimination of non-compressibles entering expansion joints.
- Jet fuel resistant. Refer to Pecora Technical Bulletins #81 and #198 for more information regarding applications requiring exposure to jet fuels.

#### Limitations:

Pecora 301 NS Silicone Pavement Sealant should not be used:

- for continuous water immersion conditions.
- when installation temperatures are below 40°F (4°C) or above 120°F (49°C).
- flush with traffic surface. (Sealant must be recessed below surface.)
- for applications requiring support of hydrostatic pressures.
- with solvents for dilution purposes.
- with concrete that is cured less than 7 days.

#### PACKAGING

- 30 fl. oz. (887ml) cartridges
- 20 fl. oz. (592ml) sausages
- 4.5 gallon pails (17.0L)
- 50 gallon drum (188.9L)

#### Color

- Pavement Grey, Limestone

- with newly applied asphalt until cooled to ambient temperature (usually 24-48 hours).
- as a structural component or in longitudinal joints greater than 3/4" in width that are intended to be used as a constant traveling surface.

SEALANT COVERAGE CHART  
RECESS GUIDELINES

Joint Width (inches)	Sealant Depth (inches)	Recess (inches)	Backer Rod Diameter (in)	Minimum Joint Depth (in)	Linear ft./gal
1/4	1/4	1/8	3/8	3/4	308
3/8	1/4	1/8	1/2	7/8	205
1/2	1/4	1/8	5/8	1-1/4	154
3/4	3/8	1/4	7/8	1-1/4	68
1.0	1/2	1/4	1-1/4	2	38

TABLE 1: TYPICAL UNCURED PROPERTIES

Test Property	Value	Test Procedure
Cure Through (days)	7	0.5" cross section
Extrusion Rate (grams/min)	90-250	Mil-S-8802
Rheological Properties	non-sag	
Tack Free Time (mins)	60	ASTM C679
VOC Content (g/L)	50	ASTM D3960

TABLE 2: TYPICAL CURED PROPERTIES  
(After 7 days cure at 77°F (25°C), 50% RH)

TEST PROPERTY	VALUE	TEST PROCEDURE
Adhesion, minimum elongation		ASTM D5329*
Asphalt	500	
Concrete	500	
Metal	500	
Elongation (%)	>1400	ASTM D412
Resilience (%)	>95	ASTM D5329
Stress @ 150% Elongation (psi)	22	ASTM D412
Hardness, maximum		
21 day cure (Shore 00) Joint	60	ASTM C661
Movement Capability		
+100/-50%; 10 cycles	Pass	ASTM C719

\*modified section 14

### TECHNICAL DATA

**Applicable Standards:** Complies with TT-S-00230C, TT-S-001543, ASTM C920, Class 100, Type S, Grade NS, Use T2, M, O, ASTM D5893 Type NS. Conforms to FAA Engineering Brief No. 36. Review Pecora Technical Bulletin #81 for airfield standards. Conforms to approximately 30 state DOT specifications which require low modulus, high movement, cold applied sealant. Sealant complies with USDA requirements for use in Federally inspected meat and poultry plants.

**Joint Design:** Sealant depth should be 1/4"-1/2" and joint width should be 1/4"-1". Ideally, the ratio of joint width to sealant depth should be 2:1, when appropriate. For joint widths greater than 1", consult Pecora Technical Services department.

### INSTALLATION

**Surface Preparation:** New or old concrete surface must be dry and free of dust, laitance, grease, oils, curing compounds, water repellents, waxes, foreign particles, and disintegrated substrate. Restoration work requires saw cutting and sandblasting, followed by blowing out with compressed air (moisture and oil-free). Joint area should be free of all dust and foreign debris before back-up material is installed. Priming may be required. P-225 / concrete or P-200 / asphalt. Proper adhesion should be confirmed prior to full scale production.

**Joint Backing:** Backer rod should be used to control the sealant depth and cushion it from impact. Closed cell polyethylene is recommended. Use a size that will compress a minimum of 25% when inserted into the joint.

**Shelf Life:** Approximately one (1) year when stored in original, unopened container in a dry area at temperatures below 80°F(27°C).

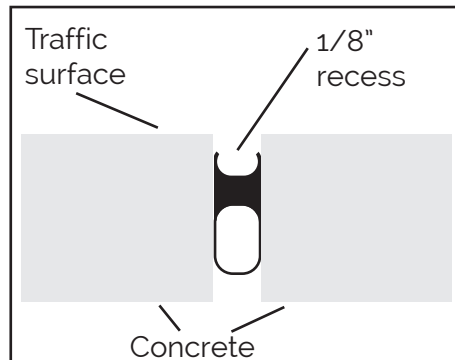


Figure 1

**Application:** Ideal installation temperatures should be 60°F(16°C) - 85°F(29°C). Sealant should be applied to the prepared joint in a continuous operation. Tool the sealant slightly concave using dry-tooling techniques. Sealant must be recessed below traffic surface. (See Figure 1).

**Initial Skin:** Approximately 60 minutes at 77°F (25°C), 50% R.H. Higher temperatures and/or humidity will shorten this time period.

**Cleaning:** Immediately remove all excess sealant and smears adjacent to joints with mineral spirits. For equipment cleanup, also use mineral spirits. Consult manufacturer's MSDS for handling and safety precautions.

**Precautions:** Use with adequate ventilation or wear an appropriate NIOSH-approved respirator. Contact with uncured sealant or with vapors generated during curing may cause respiratory tract irritation. Contact with skin or eyes may cause irritation or allergic reaction. Avoid contact and wash thoroughly after handling. May be harmful if swallowed. Refer to Safety Data Sheets (SDS) for more information.

FOR PROFESSIONAL USE ONLY.  
KEEP OUT OF THE REACH  
OF CHILDREN.

### AVAILABILITY AND COST

Pecora products are available from our plants and warehouses, or from stocking distributors in all major cities. For the name and telephone number of your nearest representative call one of our locations listed below or visit our website at [www.pecora.com](http://www.pecora.com).

### WARRANTY

Pecora Corporation warrants its products to be free of defects. Under this warranty, we will provide, at no charge, replacement materials for, or refund the purchase price of, any product proven to be defective when used in strict accordance with our published recommendations and in applications considered by us as suitable for this product. This warranty is in lieu of any and all other warranties, expressed or implied, and in no case will Pecora be liable for incidental or consequential damages.

### MAINTENANCE

Once sealant is in place and cured, it is basically maintenance free. If damage to sealant occurs, cut out the affected area, clean with vacuum or compressed air and recaulk.

### TECHNICAL SERVICES

Pecora representatives are available to assist you in selecting an appropriate product and to provide on-site application instructions or to conduct jobsite inspections. For further assistance call our Technical Service Department at 800-523-6688.

### FILING SYSTEMS

• CSI MasterFormat Designation  
-07 92 00 Joint Sealants