


SEAL CRACK FLUSH with
PECORA DECK-SEAL or
DYNATRED TRAFFIC-GRADE
POLYURETHANE
JOINT SEALANT

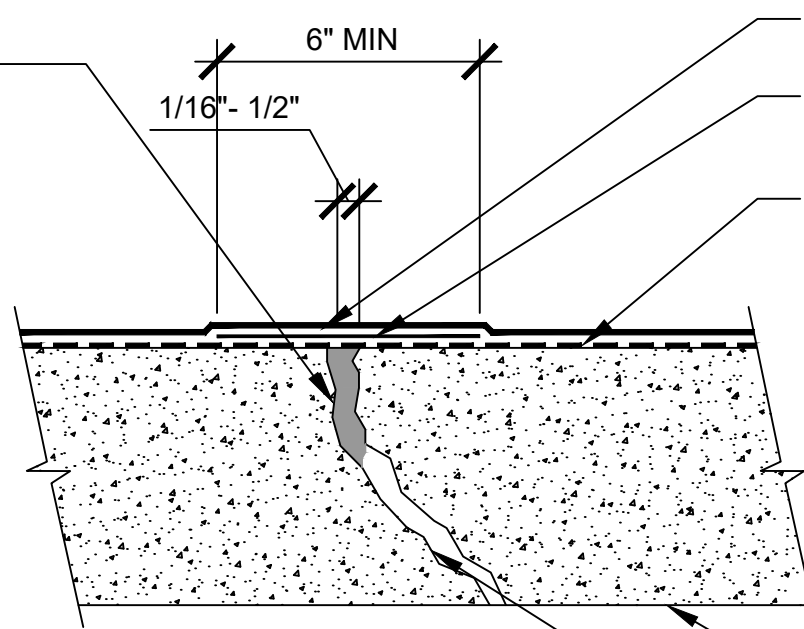

TOP COAT: PECORA-DECK HB1100-SA

DETAIL COAT: PECORA-DECK HB1100-SA, 802
BASE COAT or 802FC FAST CURE BASE COAT

PRIMER (WHERE REQ'D): PECORA P-801-VOC,
P-808 or DYNAPOXY HEALER/SEALER

CAST-IN-PLACE or PRECAST CONCRETE
FLOOR DECK or SLAB

NON-MOVING (STATIC) CRACK from
1/16\" to 1/2\" WIDE

NOTES:

- SEE HB1100-SA APPLICATION GUIDE for SYSTEM COAT and COATING THICKNESSES and INSTALLATION INSTRUCTIONS.