

CLOSED CELL BACKER ROD &
PECORA DECK-SEAL or DYNATRED
TRAFFIC-GRADE POLYURETHANE
JOINT SEALANT - MAINTAIN 2:1
SEALANT WIDTH TO DEPTH
RATIO


SUPPLEMENTARY
JOINT FILLER or SAFING
(OPTIONAL)

6" MIN

TOP COAT: PECORA-DECK HB1100-SA

DETAIL COAT: PECORA-DECK HB1100-SA,
802 BASE COAT or 802FC FAST CURE BASE COAT

PRIMER (WHERE REQ'D): PECORA P-801-VOC,
P-808 or DYNAPOXY HEALER/SEALER

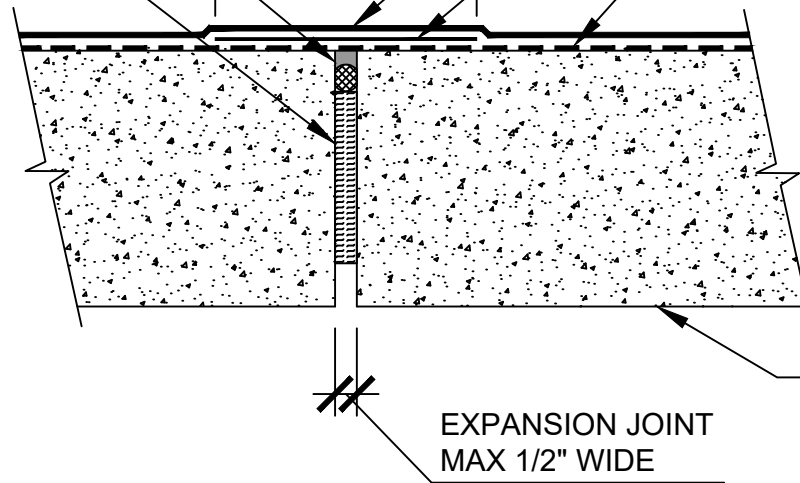

CAST-IN-PLACE or PRECAST CONCRETE
DECK or SLAB

EXPANSION JOINT
MAX 1/2" WIDE

NOTES:

- SEE HB1100-SA APPLICATION GUIDE for SYSTEM COAT and COATING THICKNESSES and INSTALLATION INSTRUCTIONS.



**PECORA
CORPORATION®**

Architectural Weatherproofing Products
U.S.A. • since 1862

Pecora Corporation is a manufacturer of materials and not a licensed design professional. Details prepared by Pecora are schematic only and are offered as a guide for the convenience of Pecora's customers.

07 18 00 - TRAFFIC COATINGS / B3040 - TRAFFIC BEARING COATINGS
PECORA-DECK HB1100-SA ONE-STEP TRAFFIC COATING
EXPANSION JOINTS UP TO 1/2" IN WIDTH

NO SCALE

REV. 02-2026

DWG NO: PEC-HB1100-SA-104