



101: STATIC (HAIRLINE) CRACKS UP TO 1/16" WIDTH

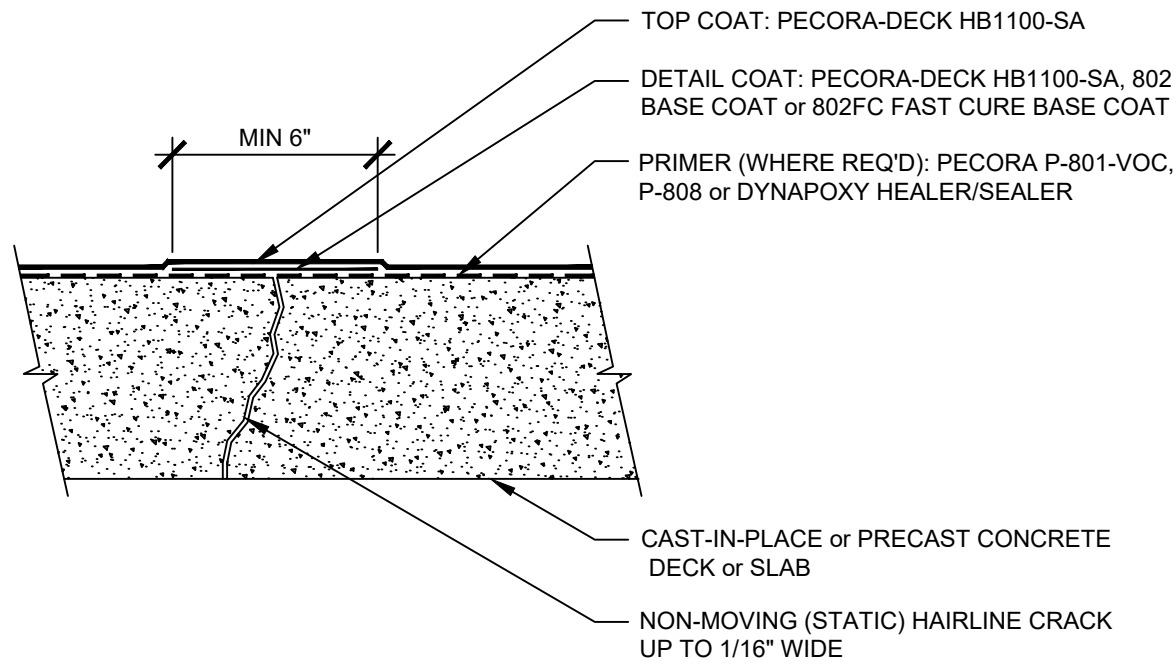


- NOTES:
- SEE HB1100-SA APPLICATION GUIDE for SYSTEM COAT and COATING THICKNESSES and INSTALLATION INSTRUCTIONS.
 - CAULKING & SEALING of HAIRLINE STATIC CRACKS up to 1/16" WIDE is NOT REQUIRED.

102: STATIC CRACKS > 1/16"

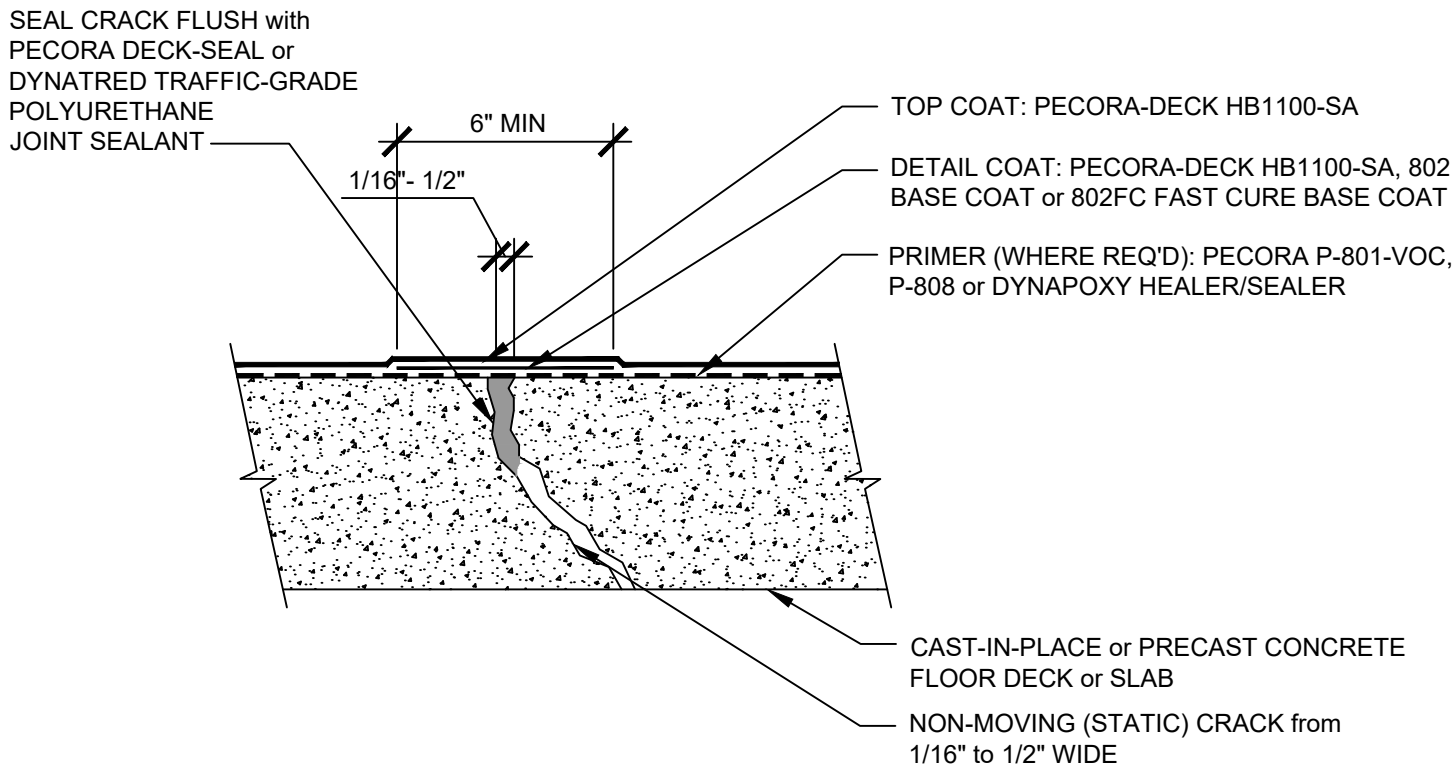


- NOTES:
- SEE HB1100-SA APPLICATION GUIDE for SYSTEM COAT and COATING THICKNESSES and INSTALLATION INSTRUCTIONS.

103: DYNAMIC CRACKS > 1/6"

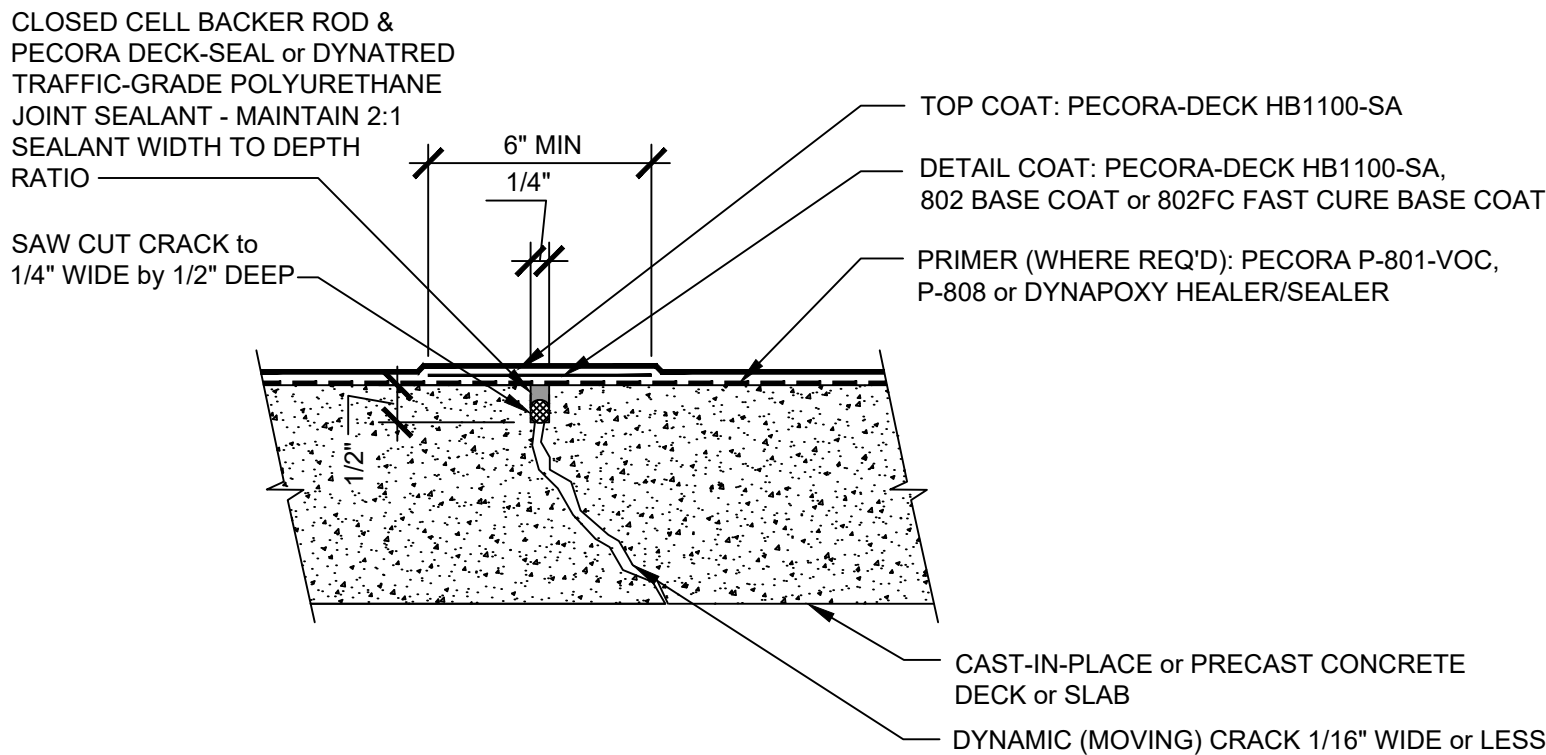


- NOTES:
- SEE HB1100-SA APPLICATION GUIDE for SYSTEM COAT and COATING THICKNESSES and INSTALLATION INSTRUCTIONS.

104: EXPANSION JOINTS UP TO 1/2" WIDTH

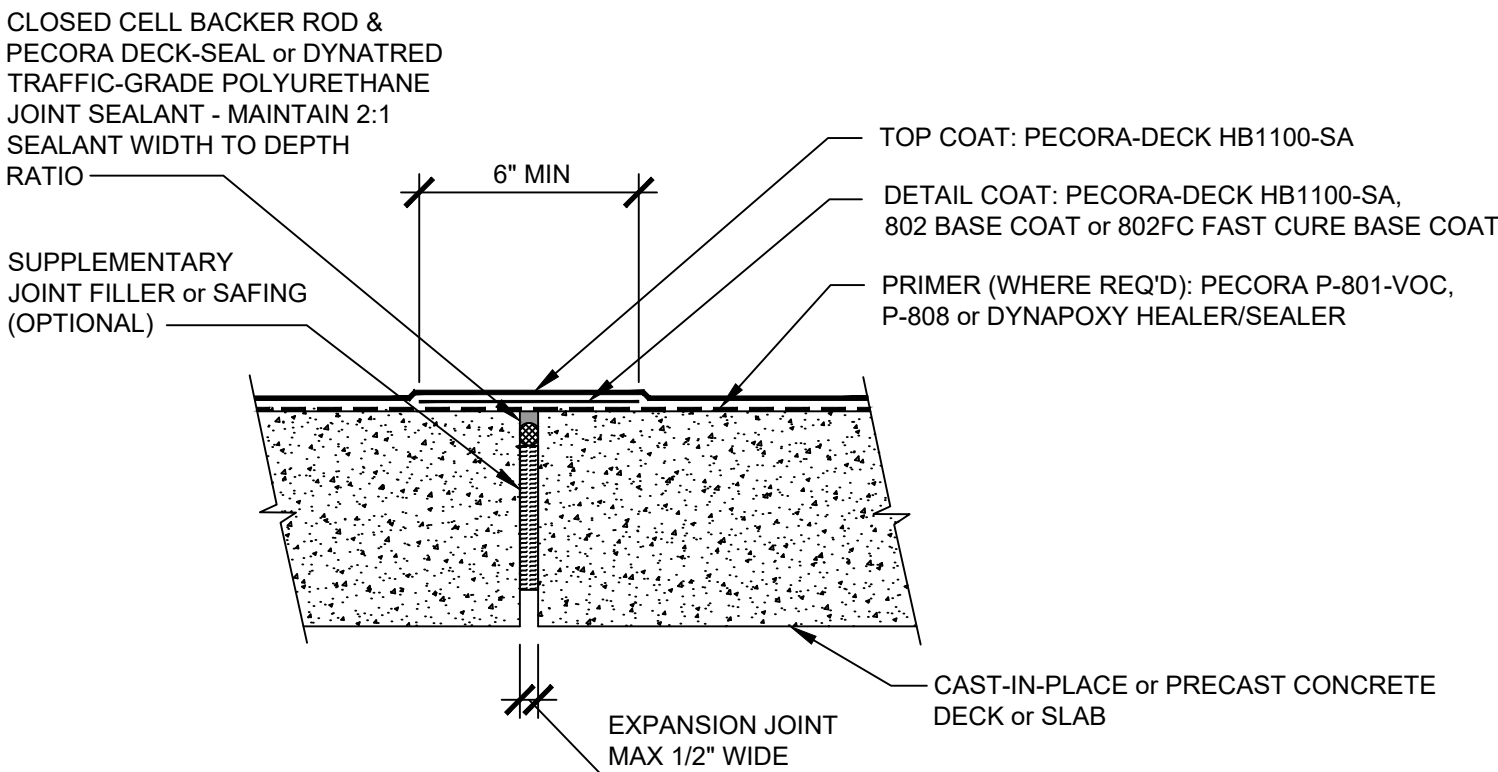

- NOTES:
- SEE HB1100-SA APPLICATION GUIDE for SYSTEM COAT and COATING THICKNESSES and INSTALLATION INSTRUCTIONS.

105: EXPANSION JOINTS > 1/2" WIDTH

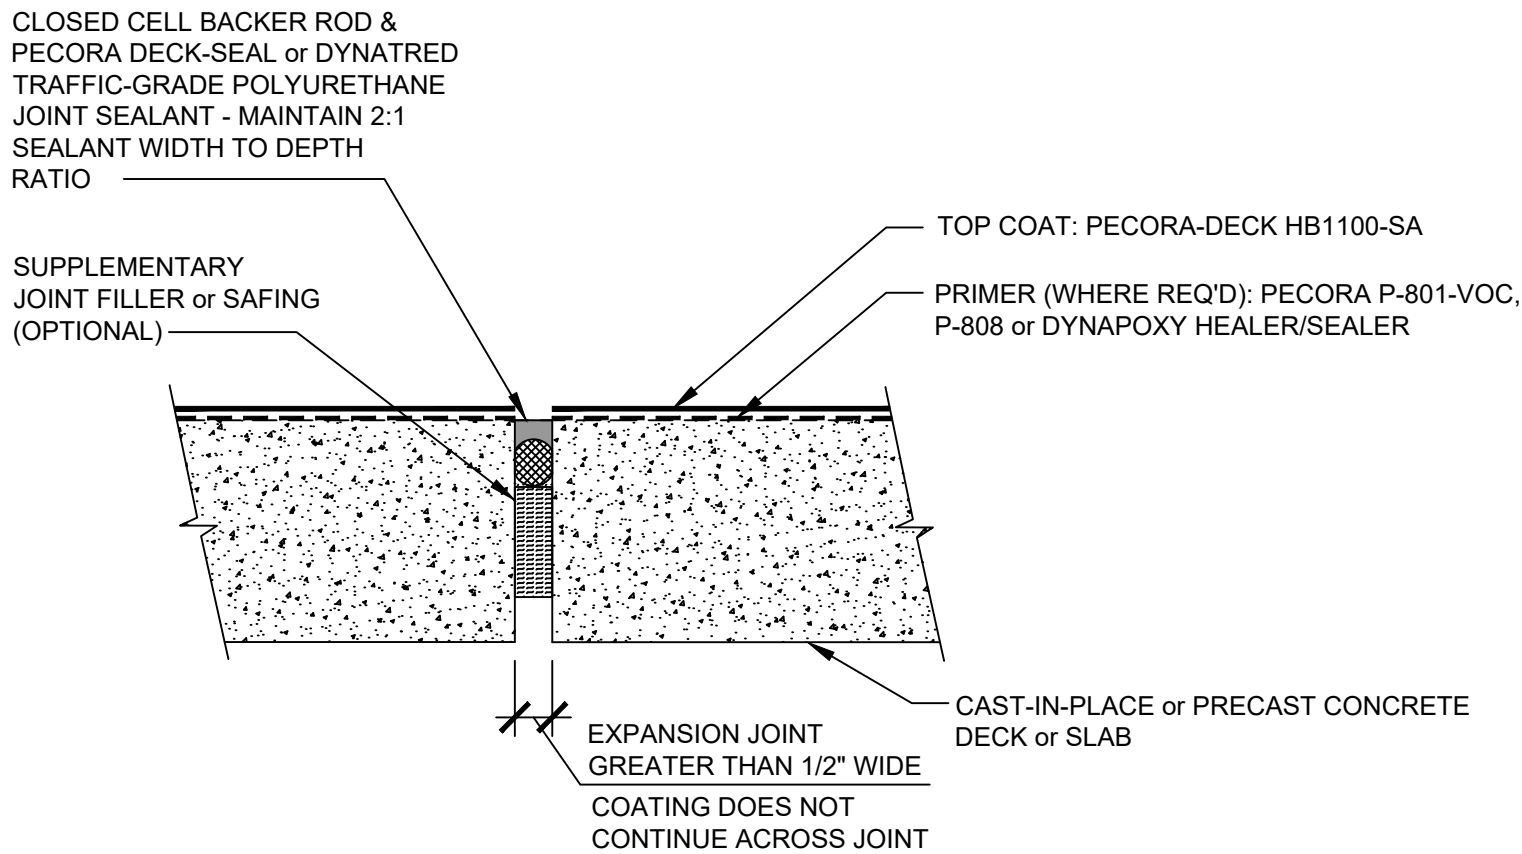

- NOTES:
- SEE HB1100-SA APPLICATION GUIDE for SYSTEM COAT and COATING THICKNESSES and INSTALLATION INSTRUCTIONS.

- NOTE:
1. SEE HB1100SA TRAINING MANUAL for SYSTEM COAT & COATING THICKNESSES and INSTALLATION INSTRUCTIONS.
 2. CAULKING & SEALING of HAIRLINE STATIC CRACKS up to 1/16" WIDE is NOT REQUIRED.