


SEAL CRACK FLUSH with
PECORA DECK-SEAL or
DYNATRED TRAFFIC-GRADE
POLYURETHANE
JOINT SEALANT

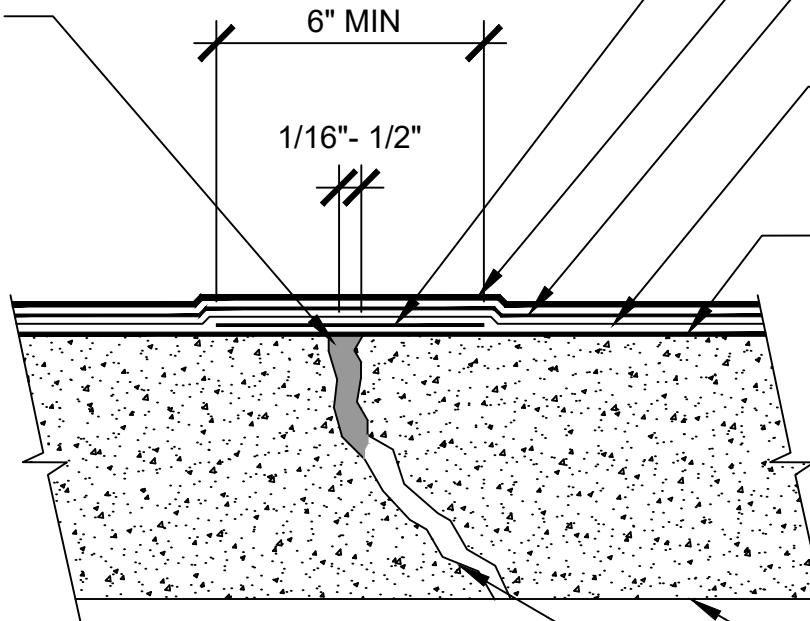

DETAIL COAT: PECORA-DECK 802 BASE COAT
or 802FC FAST CURE BASE COAT

TOP COAT: PECORA-DECK HB1000

INTERMEDIATE WEAR COAT (OPTIONAL):
PECORA DYNAPOXY LOW-MOD EPOXY

WATERPROOFING BASE COAT (OPTIONAL):
PECORA-DECK 802 BASE COAT or 802FC FAST
CURE BASE COAT

BASE COAT PRIMER: PECORA P-801-VOC, P-808,
or DYNAPOXY HEALER/SEALER

CAST-IN-PLACE or PRECAST CONCRETE
DECK or SLAB

NON-MOVING (STATIC) CRACK from
1/16" to 1/2" WIDE

NOTES:

- SEE HB1000 APPLICATION GUIDE for SYSTEM COAT and COATING THICKNESSES and INSTALLATION INSTRUCTIONS.