


CLOSED CELL BACKER ROD &
PECORA DECK-SEAL or DYNATRED
TRAFFIC-GRADE POLYURETHANE
JOINT SEALANT - MAINTAIN 2:1
SEALANT WIDTH TO DEPTH
RATIO

SAW CUT CRACK to
1/4" WIDE by 1/2" DEEP

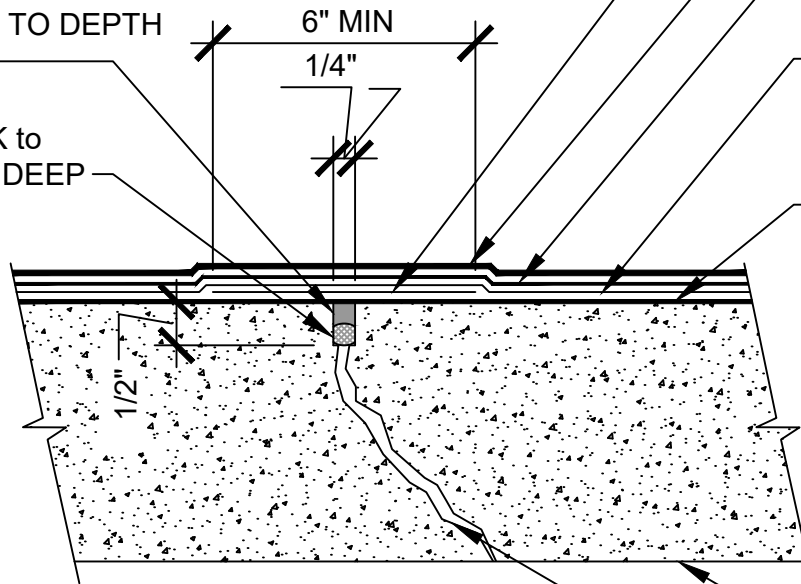

DETAIL COAT: PECORA-DECK 802 BASE COAT
or 802FC FAST CURE BASE COAT

TOP COAT: PECORA-DECK HB1000

INTERMEDIATE COAT (OPTIONAL):
PECORA DYNAPOXY LOW-MOD EPOXY

WATERPROOFING BASE COAT (OPTIONAL):
PECORA-DECK 802 BASE COAT or 802FC FAST
CURE BASE COAT

BASE COAT PRIMER: PECORA P-801-VOC, P-808,
or DYNAPOXY HEALER/SEALER

CAST-IN-PLACE or PRECAST CONCRETE
DECK or SLAB

MOVING (DYNAMIC) CRACK 1/16" WIDE or LESS

NOTES:

- SEE HB1000 APPLICATION GUIDE for SYSTEM COAT and COATING THICKNESSES and INSTALLATION INSTRUCTIONS.