


CLOSED CELL BACKER ROD &
PECORA DECK-SEAL or DYNATRED
TRAFFIC-GRADE POLYURETHANE
JOINT SEALANT - MAINTAIN 2:1
SEALANT WIDTH TO DEPTH
RATIO

SAW CUT CRACK to
1/4" WIDE by 1/2" DEEP

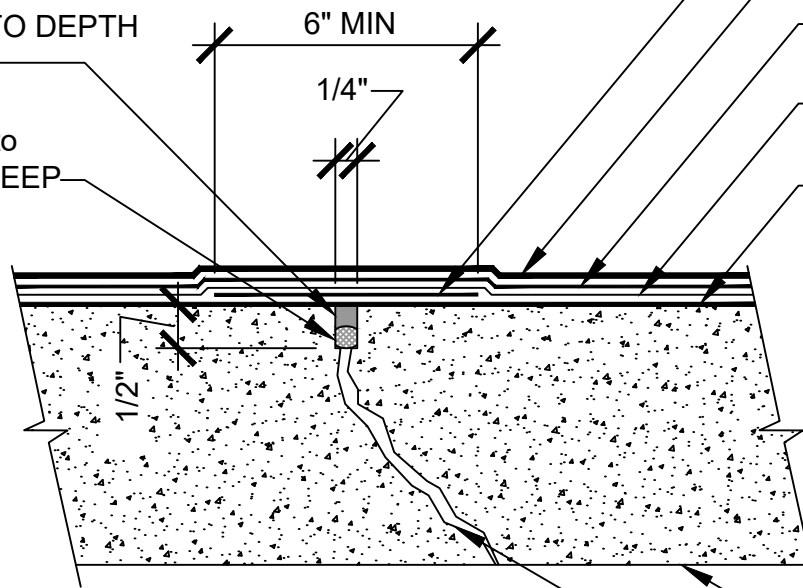

DETAIL COAT: PECORA-DECK 802 BASE COAT or
802FC FAST CURE BASE COAT

TOP COAT: PECORA-DECK 806

INTERMEDIATE COAT (OPTIONAL): PECORA-DECK 804

BASE COAT: PECORA-DECK 802 BASE COAT or
802FC FAST CURE BASE COAT

BASE COAT PRIMER: PECORA P-801-VOC, P-808,
or DYNAPOXY HEALER/SEALER

CAST-IN-PLACE or PRECAST CONCRETE
FLOOR, DECK, or SLAB

MOVING (DYNAMIC) CRACK 1/16" WIDE or LESS

NOTES:

- SEE PECORA DECK 800 SERIES APPLICATION GUIDE for SYSTEM COAT, COATING THICKNESSES and INSTALLATION INSTRUCTIONS.