


SEAL CRACK FLUSH with
 PECORA DECK-SEAL or
 DYNATRED TRAFFIC-GRADE
 POLYURETHANE
 JOINT SEALANT

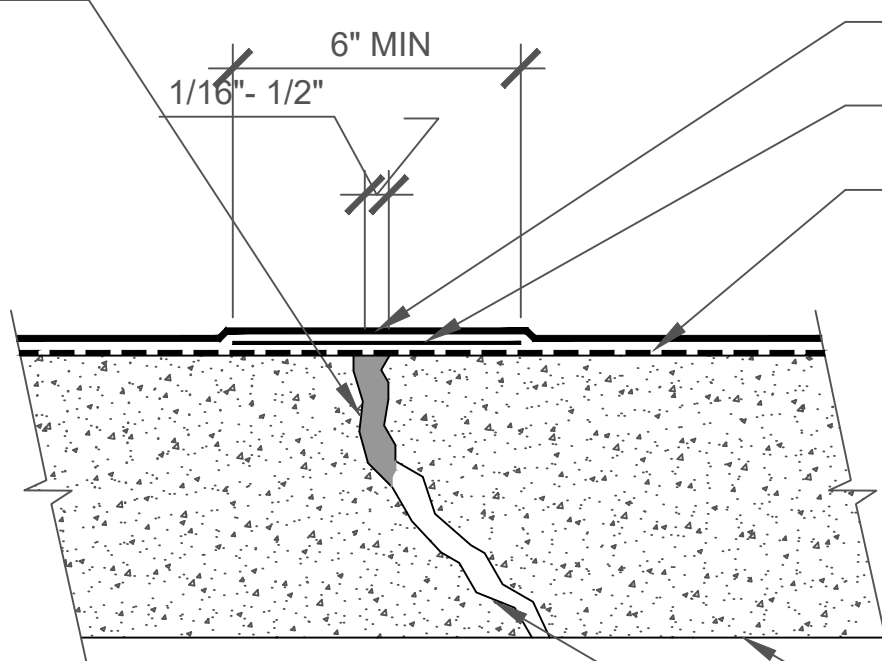

PECORA-DECK HB1100-SA TOP COAT

DETAIL COAT of PECORA-DECK HB1100-SA

PECORA P-801-VOC POLYURETHANE PRIMER
 or P-808 EPOXY PRIMER (PRIMER OPTIONAL
 for PEDESTRIAN-GRADE COATING ONLY)

CAST-IN-PLACE or PRECAST CONCRETE
 FLOOR, DECK, or SLAB

NON-MOVING (STATIC) CRACK from
 1/16" to 1/2" WIDE

NOTE:
 SEE HB1100-SA APPLICATION & TRAINING MANUAL for COATING
 SYSTEM THICKNESSES & FULL INSTALLATION INSTRUCTIONS.



Pecora Corporation is a manufacturer of materials and not a licensed design professional. Details prepared by Pecora are schematic only and are offered as a guide for the convenience of Pecora's customers.

07 18 00 - TRAFFIC COATINGS / B3040 - TRAFFIC BEARING COATINGS
 PECORA-DECK HB1100-SA ONE-STEP TRAFFIC COATING
 TREATMENT OF STATIC CRACKS >1/16" IN WIDTH

NO SCALE

REV: 02/2024

DWG NO: PEC-HB1100SA-102