


NOTE:
SEE HB1100-SA APPLICATION & TRAINING MANUAL for COATING
SYSTEM THICKNESSES & FULL INSTALLATION INSTRUCTIONS.

CLOSED CELL BACKER ROD &
PECORA DECK-SEAL or DYNATRED
TRAFFIC-GRADE POLYURETHANE
JOINT SEALANT - MAINTAIN 2:1
SEALANT WIDTH TO DEPTH
RATIO

SUPPLEMENTARY
JOINT FILLER or SAFING
(OPTIONAL)

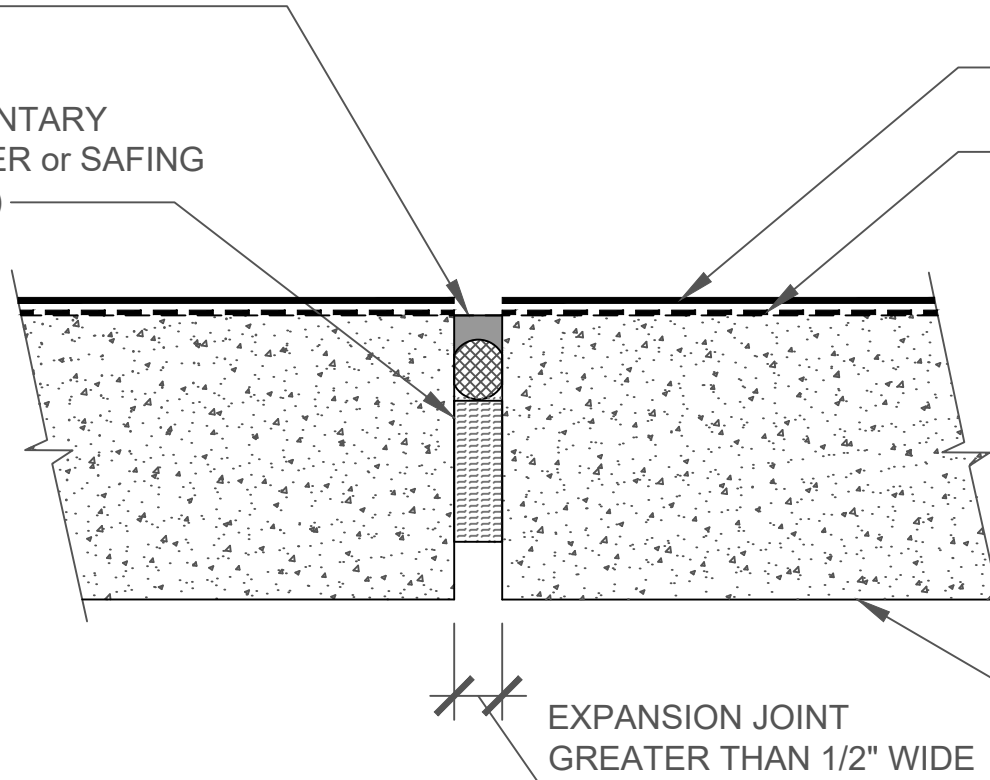

PECORA-DECK HB1100-SA TOP COAT

PECORA P-801-VOC POLYURETHANE PRIMER
or P-808 EPOXY PRIMER (PRIMER OPTIONAL
for PEDESTRIAN-GRADE COATING ONLY)

CAST-IN-PLACE or PRECAST CONCRETE
FLOOR, DECK, or SLAB

EXPANSION JOINT
GREATER THAN 1/2" WIDE

COATING DOES NOT
CONTINUE ACROSS JOINT



**PECORA
CORPORATION®**

Architectural Weatherproofing Products
U.S.A. • since 1862

Pecora Corporation is a manufacturer of materials and not a licensed design professional. Details prepared by Pecora are schematic only and are offered as a guide for the convenience of Pecora's customers.

07 18 00 - TRAFFIC COATINGS / B3040 - TRAFFIC BEARING COATINGS
PECORA-DECK HB1100-SA ONE-STEP TRAFFIC COATING
EXPANSION JOINTS GREATER THAN 1/2" IN WIDTH

NO SCALE

REV: 02/2024

DWG NO: PEC-HB1100SA-105