PLYWOOD, OSB, OR
GYPSUM SHEATHING

WOOD OR STRUCTURAL
METAL STUD FRAMING

FILL NON-MOVING JOINTS
& SEAMS WITH PECORA
XL-FLASH LIQUID FLASHING
& JOINT FILLER

EXTERIOR

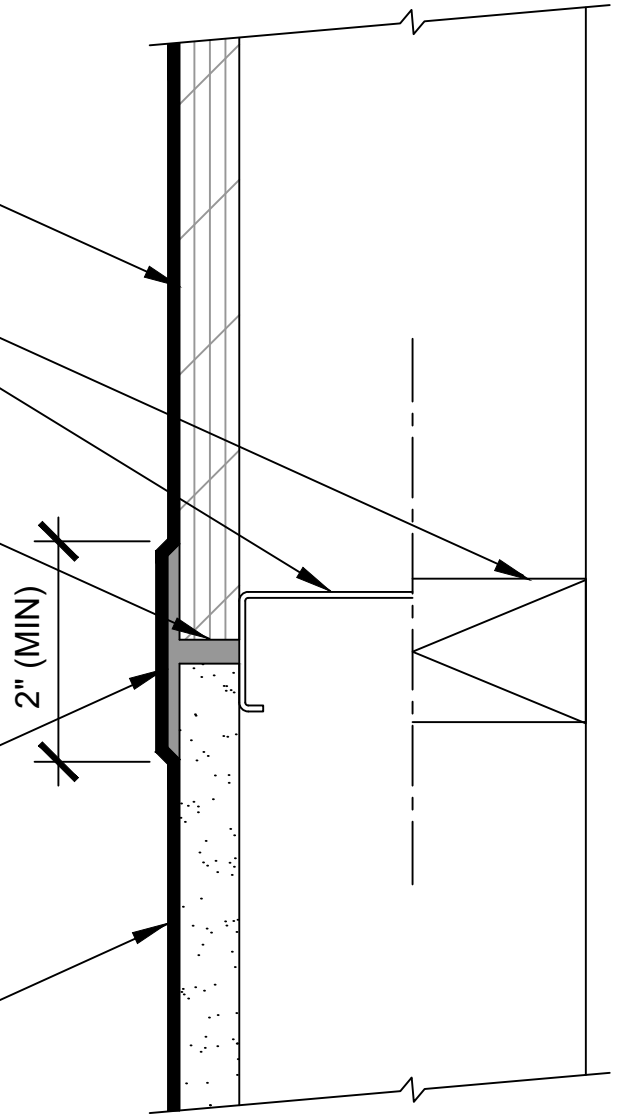

LIQUID FLASHING & JOINT FILLER:
PECORA XL-FLASH - APPLY TO
SHEATHING AT 20-40 WET MILS
CENTERED OVER JOINT

WEATHER BARRIER, VAPOR
RETARDER, AIR BARRIER:
PECORA XL-PERM (ULTRA) VP
APPLY TO SHEATHING AT
10-14 WET MILS (8-12 MILS DFT)

PECORA CORPORATION®
Architectural Weatherproofing Products
U.S.A. • since 1862

Pecora Corporation is a manufacturer of materials and not a licenced design professional. Details prepared by Pecora are schematic only and are offered as a guide for the convenience of Pecora's. customers.

07 27 00 AIR BARRIERS / B2010.80 EXTERIOR WALL SUPP COMPONENTS

Pecora ProPerm VP
SHEATHING JOINT TREATMENT

NO SCALE	REV: 3-1-2024	DRAWING NO.: PEC-PPVP-SJT-001