

LINE OF AIR, VAPOR & WATER
CONTROL LAYERS


INTERIOR

EXTERIOR

STRUCTURAL METAL STUD
OR WOOD FRAMED &
SHEATHED EXTERIOR
WALL CONSTRUCTION

SUPPLEMENTAL
INSULATION
(WHERE REQUIRED)

NOTE: COORDINATE THIS
DETAIL WITH ARCHITECTURAL
DRAWINGS

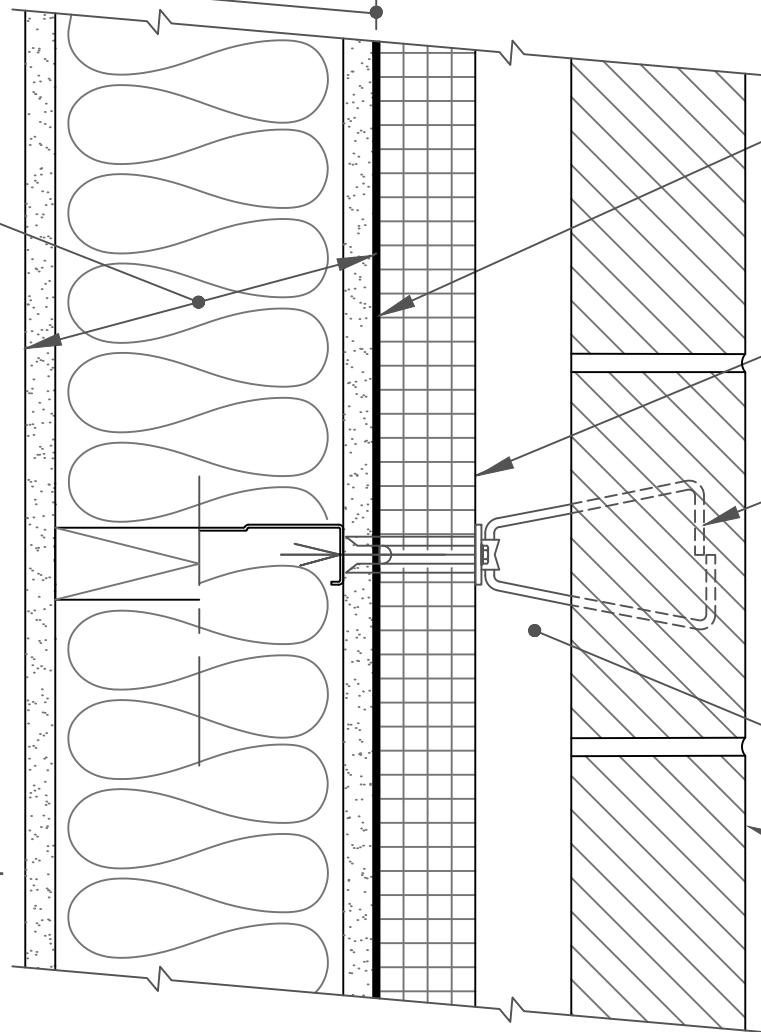

WEATHER BARRIER, VAPOR
RETARDER, AIR BARRIER: PECORA
XL-PERM (ULTRA) VP - APPLY AT
9-13 WET MILS (8-12 MILS DFT)

INSULATION

MASONRY TIE

CAVITY/AIR SPACE

EXTERIOR VENEER

NOTES:

1. APPLY 3/4" DOLLOP OF XL-FLASH OVER AREA PENETRATED BY MASONRY VENEER ANCHORS.
2. DOLLOP OF XL-FLASH IS NOT REQUIRED WHERE GASKETED MASONRY VENEER ANCHORS THAT SEAL TO CURED XL-PERM (ULTRA) VP ARE INSTALLED.



**PECORA
CORPORATION®**

Architectural Weatherproofing Products
U.S.A. • since 1862

*Pecora Corporation is a
manufacturer of materials
and not a licensed design
professional. Details
prepared by Pecora are
schematic only and are
offered as a guide for the
convenience of Pecora's
customers.*

07 27 00 AIR BARRIERS / B2010.80 EXTERIOR WALL SUPP COMPONENTS

**XL-PERM (ULTRA) VP
BRICK VENEER ANCHOR**

NO SCALE

REV: 4-1-2024

DRAWING NO.: PEC-VP-BRT-001