

ROUT OR FORM 1/2" X 1/2" JOINT AROUND DRAIN.
EXTEND PRIMER & COATINGS ONTO SIDE of JOINT &
FILL with PECORA DECK-SEAL OR DYNATRED JOINT
SEALANT


BOND BREAKER TAPE - NOT
REQUIRED FOR NON-MOVING
JOINTS

TOP COAT: PECORA-DECK HB1000

INTERMEDIATE COAT (OPTIONAL):
PECORA DYNAPOXY LOW-MOD EPOXY

WATERPROOFING BASE COAT (OPTIONAL):
PECORA-DECK 802 BASE COAT or 802FC FAST
CURE BASE COAT

BASE COAT PRIMER: PECORA P-801-VOC,
P-808, or DYNAPOXY HEALER/SEALER

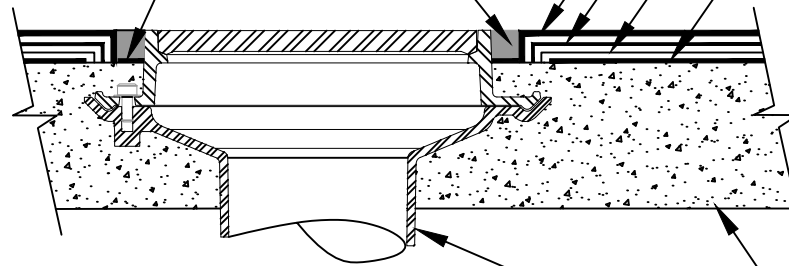

CAST-IN-PLACE or PRECAST CONCRETE
DECK or SLAB

DRAIN BODY

NOTES:

- SEE HB1000 APPLICATION GUIDE for SYSTEM COAT and COATING THICKNESSES and INSTALLATION INSTRUCTIONS.



Pecora Corporation is a manufacturer of materials and not a licensed design professional. Details prepared by Pecora are schematic only and are offered as a guide for the convenience of Pecora's customers.

07 18 00 - TRAFFIC COATINGS / B3040 - TRAFFIC BEARING COATINGS
PECORA-DECK HB1000 DECK COATING SYSTEM
COATING APPLICATION AROUND DECK DRAIN

NO SCALE

REV: 02-2026

DWG NO: PEC-HB1000-109