


ROUT OR FORM 1/2" X 1/2" JOINT AROUND DRAIN.  
 EXTEND PRIMER & COATINGS ONTO SIDE of JOINT &  
 FILL with PECORA DECK-SEAL OR DYNATRED JOINT  
 SEALANT

BOND BREAKER TAPE - NOT  
 REQUIRED FOR NON-MOVING  
 JOINTS

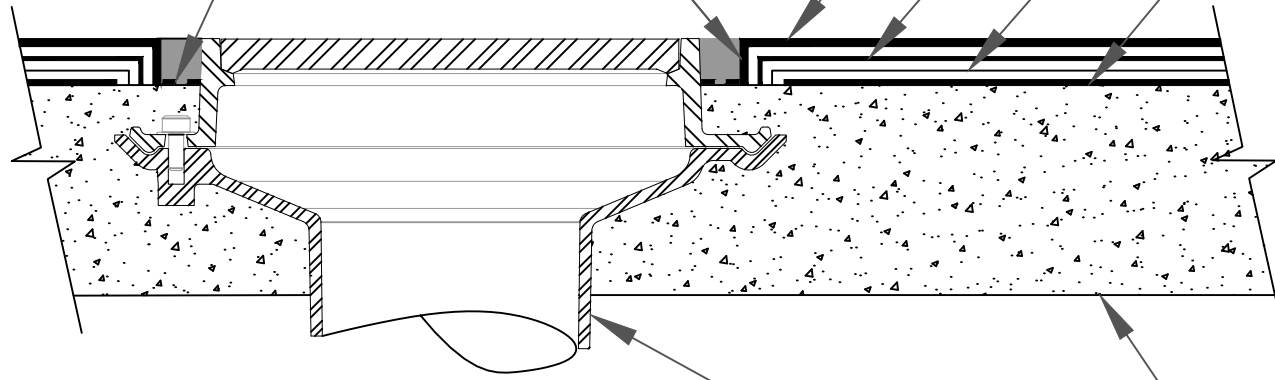

PECORA-DECK HB1000 HIGH-BUILD  
 TOP COAT

PECORA DYNAPOXY LOW-MOD EPOXY  
 INTERMEDIATE COAT (OPTIONAL)

PECORA-DECK 802 or 802FC  
 BASE COAT (OPTIONAL)

PECORA P-801-VOC POLYURETHANE  
 or P-808 EPOXY PRIMER

DRAIN BODY

CAST-IN-PLACE or PRECAST  
 CONCRETE FLOOR, DECK, or SLAB

**NOTE:**  
 COATINGS & COATING THICKNESSES PER  
 SPECIFIED PECORA-DECK HB1000 TRAFFIC  
 COATING SYSTEM.



Pecora Corporation is a manufacturer of materials and not a licensed design professional. Details prepared by Pecora are schematic only and are offered as a guide for the convenience of Pecora's customers.

07 18 00 - TRAFFIC COATINGS / B3040 - TRAFFIC BEARING COATINGS  
**PECORA-DECK HB1000 DECK COATING SYSTEM**  
**TREATMENT AROUND DECK DRAIN**

NO SCALE

REV: 11-2020

DWG NO: PEC-HB1000-109