


LINE OF AIR, VAPOR, & WATER
CONTROL LAYERS

INTERIOR

EXTERIOR

CAST-IN-PLACE CONCRETE,
PRECAST CONCRETE, OR UNIT
MASONRY EXTERIOR WALL
CONSTRUCTION

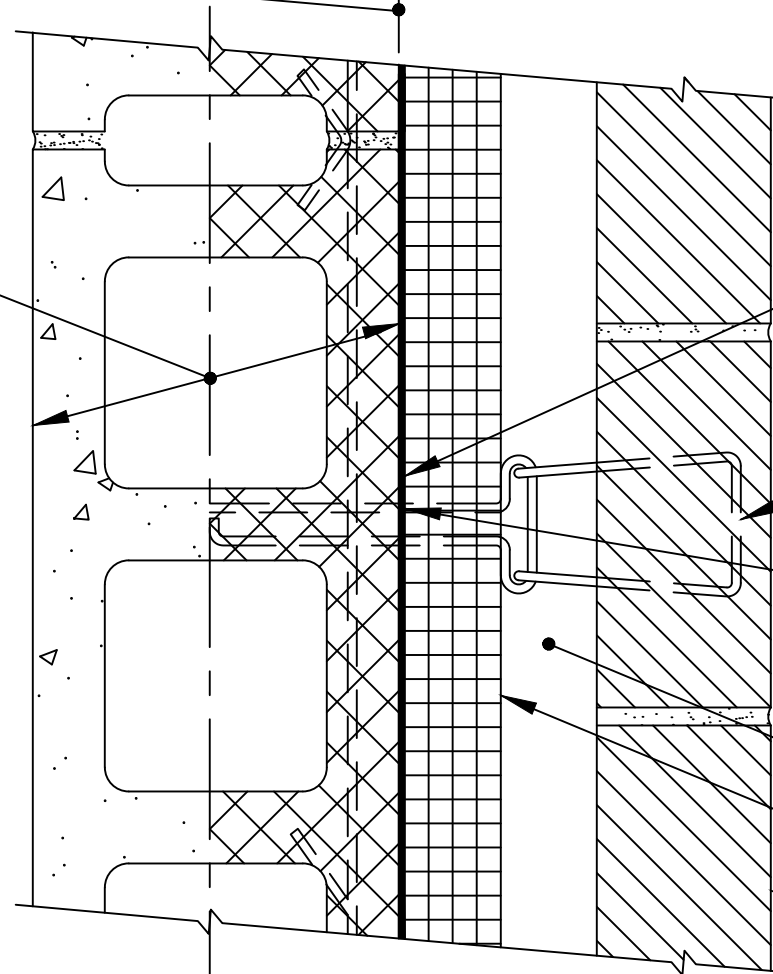

WEATHER BARRIER, VAPOR
RETARDER, AIR BARRIER: PECORA
ProPerm VP - APPLY AT 10-16
WET MILS (7-12 MILS DFT)

MASONRY TIE

TREAT PENETRATIONS WITH
3/4" DOLLOP OF PECORA
XL-FLASH LIQUID FLASHING
& JOINT FILLER

AIR SPACE

INSULATION

EXTERIOR VENEER

NOTE: COORDINATE THIS DETAIL
WITH ARCHITECTURAL DRAWINGS



**PECORA
CORPORATION®**

Architectural Weatherproofing Products
U.S.A. • since 1862

*Pecora Corporation is a
manufacturer of materials
and not a licensed design
professional. Details
prepared by Pecora are
schematic only and are
offered as a guide for the
convenience of Pecora's
customers.*

07 27 00 AIR BARRIERS / B2010.80 EXTERIOR WALL SUPP COMPONENTS

**Pecora ProPerm VP
CONCRETE/CMU WALL-ADJUSTABLE MASONRY TIE**

NO SCALE

REV: 3-1-2024

DRAWING NO.: PEC-PPVP-BRT-002